

RS II DI

YEARS OF WARRANTY



ROBUST AND HIGH-PERFORMANCE

- **DI (Double Insulated) pump:** insulated motor shaft, no contact with water
- Suitable for **large flow volumes (infinity or overflow)**
- **Lexan™ transparent lid with wingnut closing system, no tools needed**
- **High resistance to heat**
- Durable: fiber-glass reinforced resin components
- **Union fittings provided**
- **Direct replacement** of former RS II models
- Recommended for pool up to **195 m³***

* Calculation based on 6 hours turnover




Input / Output 2" Fitting 50 mm or 63 mm depending on the model



Lexan™ transparent lid with wingnut closing system



Wing screw drain plug

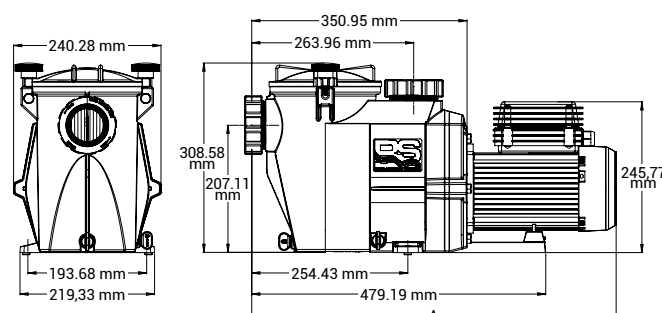


Technical Specifications


Max. water temp.	35°C
Mechanical seal	AISI 304, compatible with salt treatment (salt chlorinator)
Motor specifications	Class F, IP55, 50 Hz, 2 Poles
Housing/impeller/strainer/lid	PP+GF/Noryl® + GF/ABS/PC
Prefilter size	2.95 L

THIS PUMP MODEL EXISTS IN VARIABLE SPEED

• RS II DI Single phase Curve

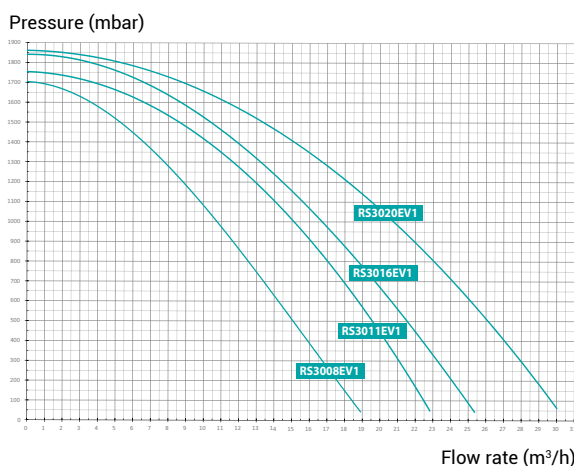

• RS II DI Three phase Curve

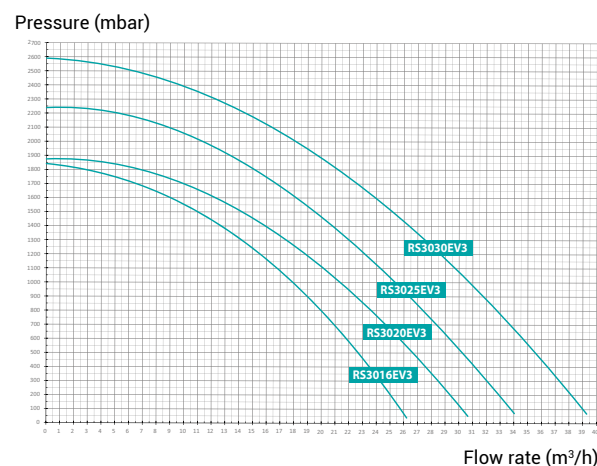

	Type	Dim A	Weight	I/O	Flow rate*	Input Power P1	Output Power P2	Amperage	Quantity per pallet	Item
SINGLE PHASE RS II DI	3/4 HP	569 mm	12.8 kg	50 mm	12.5 m³/h	800 W	573 W	3.6 A	12	RS3008EV1
	1 HP	569 mm	13.9 kg	50 mm	17 m³/h	930 W	694 W	4.15 A	12	RS3011EV1
	1.5 HP	594 mm	15 kg	63 mm	18.75 m³/h	1100 W	812 W	5.30 A	12	RS3016EV1
	2 HP	594 mm	15 kg	63 mm	23 m³/h	1400 W	1052 W	6.50 A	12	RS3020EV1
THREE PHASE RS II DI	2 HP	600 mm	17 kg	63 mm	23.7 m³/h	1400 W	1200 W	5.72/3.30 A	12	RS3020EV3
	2.5 HP	630 mm	20.5 kg	63 mm	27.5 m³/h	1900 W	1650 W	8.20/4.70 A	12	RS3025EV3
	3 HP	630 mm	20.5 kg	63 mm	32.85 m³/h	2700 W	2340 W	8.20/4.70 A	12	RS3030EV3

* under 8 m water column pressure

